

Polyester 12 Strand

Polyester 12 Strand has the lowest stretch and highest strength of all polyester constructions.

Its torque free braided construction provides easy handling and prevents kinks and hockles. Polyester 12 Strand is delivered standard with a clear polyurethane finish and is easily spliced using a simple lockstitch type splice. The largest market for this rope, transmission stringing lines, typically consists of sets of ropes in four different colors.

Features & Benefits

- Low stretch
- High strength
- Soft hand
- Torque free
- Easy splicing

Applications

- Transmission stringing lines
- Underground pulling lines
- Lifting slings
- Adjustable transformer slings

Nominal Diameter		Size (circ in.)	Approximate Weight		Minimum Tensile Strength Spliced Rope		Minimum Tensile Strength ISO Unspliced Rope	
inch	mm		lbs/100ft	kg/100m	lbs	MT (tonnes)	lbs	MT (tonnes)
3/8	9	1-1/8	4.2	6.3	6,100	2.8	6,800	3.1
7/16	11	1-1/4	6.3	9.4	9,000	4.1	10,000	4.5
1/2	12	1-1/2	8.5	12.6	10,900	4.9	12,100	5.5
9/16	14	1-3/4	10.1	15	13,600	6.2	15,100	6.9
5/8	16	2	13.1	19.5	17,500	7.9	19,400	8.8
3/4	18	2-1/4	17.2	25.6	21,900	9.9	24,300	11.0
7/8	22	2-3/4	25.8	38.4	28,500	12.9	31,700	14.4
1	24	3	34.5	51.3	41,000	18.6	45,600	20.7
1-1/8	28	3-1/2	40	59.5	47,500	21.6	52,800	24.0
1-1/4	30	3-3/4	44.5	66.2	56,700	25.7	63,000	28.6
1-5/16	32	4	53.1	79	59,800	27.1	66,400	30.1
1-1/2	36	4-1/2	69	102.7	69,800	31.7	77,600	35.2
1-5/8	40	5	82.5	122.8	83,000	37.7	92,200	41.8
1-3/4	44	5-1/2	96.1	143	98,000	44.5	108,900	49.4
2	48	6	117	174.1	120,000	54.4	133,300	60.5


Tensile Strengths are determined in accordance with Cordage Institute 1500, Test Methods for Fiber Rope. Weights are calculated at linear density under standard preload (200d²) plus 5%. See reverse side for application and safety information.

Technical Information

Specific gravity	1.38*
Melting point	482°F (250°C)
Critical temp.	350°F (177°C)
Coefficient of friction	0.12–0.15*
Elongation at break	15–20%
Fiber water absorption	0–1%
UV resistance	excellent
Wet abrasion	excellent
Dry abrasion	excellent

* value based on data supplied by the fiber manufacturer for new, dry fiber

Polyester 12 Strand Elongation (%)

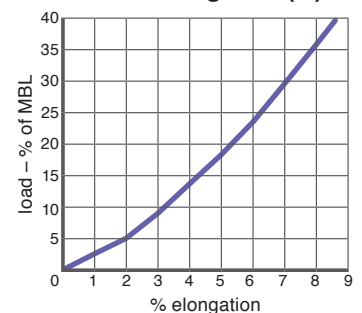

Polyester 12 Strand

Rope Specifications

Minimum Tensile Strength Minimum tensile strengths shown are for new (unused) rope and will decrease after use. All tests are performed in accordance with Cordage Institute Standard CI 1500-2. The rope strength will be reduced after use due to heat, abrasion, ultraviolet or chemical exposure. The tensile strengths may be further reduced by up to 50% as a result of knots or kinks. Minimum tensile strengths are defined as two standard deviations (typical about 10%) below the average.

Maximum Working Loads Maximum working loads are determined by dividing the tensile strength by the safety factor. The safety factor is a function of the physical properties of the rope, the age and history of the rope, the type of service it will be subjected to and the risks involved if failure occurs. For a rope manufacturer to give blanket working load recommendations would be like a car manufacturer giving the "safe driving speed" of their cars. Obviously the conditions of use far outweigh the design characteristics of the rope. Typically safety factors vary from 3:1 (for new rope used in applications with uniform loading and where failure would cause little or no risk to equipment or personnel) to 20:1 (for conditions involving moderate shock loading, possibility of snags or kinks or where failure could cause severe risk to equipment or personnel).

Rope Weights Rope weights shown are average and may vary plus or minus 5%.

Working Elongation Working elongation is shown from a preload tension of 200 times the diameter squared per the Cordage Institute Standard.

Special Requirements

Factory Splicing Various types are available for all of our ropes. Splices can be provided with various types of chafe protection or coatings.

Custom Lengths Special constructions are available on request.

Rope Terminations Cortland can provide custom terminations such as thimbles, links, rings and custom hardware. Terminations are available in plastic, bronze, stainless steel and galvanized steel. Please call, or email your requirements to cortland@cortlandcompany.com for a quotation.

Special Coatings Coatings such as polyurethane, polyethylene and vinylesters may be applied to any of the synthetic ropes to improve snag resistance, sunlight resistance or for color coding. Cortland can provide ropes with a variety of finishes to meet your needs.

Commercial and Military Specifications Certificates of compliance are supplied at no charge if requested when placing the order. Certified test reports can be provided at an additional charge when requested at the time of the order.