

BOB® 12x12 Strand

BOB® 12x12 Strand is a high strength, low elongating single braided patented rope construction with excellent long term creep resistance and superior cyclic fatigue performance, especially in bend-over-sheave applications. In the 12x12 strand construction, each strand consists of a smaller 12 strand rope produced using a proprietary blend of fibers. This design maximizes the strength of the fiber while allowing damaged rope strands to be removed and replaced if necessary. BOB® 12x12 Strand comes standard with a specially formulated coating that is designed to maximize the rope's durability in bending situations.

BOB 12x12 Strand is easily spliced using a lockstitch type splice, Brummel splice, 4-3-2 or 5-4-3 Tuck splice. The soft, torque free braided construction provides easy handling.

Features & Benefits

- High strength
- Low stretch
- Ultra low creep
- Soft hand
- Torque free
- Easy splicing

Applications

- Replacement for wire rope deep water lifting
- Use on drum and traction winches
- Active heave compensation systems
- Heavy lift slings
- High fatigue applications
- Seismic tow cables
- Tether applications

| Nominal Diameter | | Size (circ in.) | Approximate Weight | | Minimum Tensile Strength Spliced Rope | | Minimum Tensile Strength ISO Unspliced Rope | |
|------------------|-----|-----------------|--------------------|---------|---------------------------------------|-------------|---|-------------|
| inch | mm | | lbs/100ft | kg/100m | lbs | MT (tonnes) | lbs | MT (tonnes) |
| 1-1/4 | 30 | 3-3/4 | 43.4 | 64.6 | 165,000 | 75 | 183,300 | 83 |
| 1-5/16 | 32 | 4 | 53.2 | 79.2 | 196,000 | 89 | 217,800 | 99 |
| 1-1/2 | 36 | 4-1/2 | 66.6 | 99.1 | 221,000 | 100 | 245,600 | 111 |
| 1-5/8 | 40 | 5 | 81.8 | 121.8 | 291,000 | 132 | 323,300 | 147 |
| 1-3/4 | 44 | 5-1/2 | 95.9 | 142.7 | 314,000 | 142 | 348,900 | 158 |
| 2 | 48 | 6 | 120.6 | 179.4 | 355,000 | 161 | 394,400 | 179 |
| 2-1/8 | 52 | 6-1/2 | 141.6 | 210.8 | 428,000 | 194 | 475,600 | 216 |
| 2-1/4 | 56 | 7 | 158.2 | 235.4 | 481,000 | 218 | 534,400 | 242 |
| 2-1/2 | 60 | 7-1/2 | 191.3 | 284.7 | 530,000 | 240 | 588,900 | 267 |
| 2-5/8 | 64 | 8 | 210.9 | 313.8 | 596,000 | 270 | 662,200 | 300 |
| 2-3/4 | 68 | 8-1/2 | 227.9 | 339.3 | 660,000 | 299 | 733,300 | 333 |
| 3 | 72 | 9 | 269.9 | 401.7 | 780,000 | 354 | 866,700 | 393 |
| 3-1/4 | 80 | 10 | 314.5 | 468.0 | 940,000 | 426 | 1,044,000 | 474 |
| 3-1/2 | 84 | 10-1/2 | 375 | 588.06 | 1,108,000 | 503 | 1,231,000 | 559 |
| 3-5/8 | 88 | 11 | 403.3 | 600.2 | 1,250,000 | 567 | 1,389,000 | 630 |
| 4 | 96 | 12 | 531.9 | 791.6 | 1,520,000 | 690 | 1,689,000 | 766 |
| 4-1/8 | 100 | 12-1/2 | 620 | 923 | 1,622,000 | 736 | 1,802,000 | 818 |
| 4-1/4 | 104 | 13 | 697 | 1037 | 1,697,000 | 770 | 1,886,000 | 856 |
| 4-1/2 | 108 | 13-1/2 | 719 | 1070 | 1,827,000 | 829 | 2,030,000 | 921 |
| 4-5/8 | 112 | 14 | 740 | 1101 | 1,880,000 | 853 | 2,089,000 | 948 |
| 4-3/4 | 116 | 14-1/2 | 796 | 1185 | 1,927,000 | 874 | 2,141,000 | 971 |
| 5 | 120 | 15 | 822 | 1223 | 2,069,500 | 939 | 2,299,000 | 1043 |
| 5-1/8 | 124 | 15-1/2 | 891 | 1326 | 2,212,000 | 1004 | 2,458,000 | 1115 |
| 5-1/4 | 128 | 16 | 953 | 1418 | 2,355,000 | 1069 | 2,617,000 | 1187 |
| 5-1/2 | 132 | 16-1/2 | 1015 | 1511 | 2,497,500 | 1133 | 2,775,000 | 1259 |
| 5-5/8 | 136 | 17 | 1102 | 1640 | 2,640,000 | 1198 | 2,933,000 | 1331 |
| 5-3/4 | 140 | 17-1/2 | 1181 | 1758 | 2,782,500 | 1262 | 3,092,000 | 1403 |
| 6 | 144 | 18 | 1264 | 1881 | 2,925,000 | 1327 | 3,250,000 | 1475 |
| 6-1/8 | 148 | 18-1/2 | 1335 | 1987 | 3,068,000 | 1392 | 3,409,000 | 1547 |
| 6-1/4 | 152 | 19 | 1407 | 2094 | 3,210,500 | 1457 | 3,567,000 | 1618 |
| 6-1/2 | 156 | 19-1/2 | 1495 | 2225 | 3,353,000 | 1521 | 3,726,000 | 1691 |
| 6-5/8 | 160 | 20 | 1571 | 2338 | 3,496,000 | 1586 | 3,884,000 | 1762 |
| 6-3/4 | 164 | 20-1/2 | 1663 | 2475 | 3,638,500 | 1651 | 4,043,000 | 1834 |
| 7 | 168 | 21 | 1741 | 2591 | 3,781,000 | 1716 | 4,201,000 | 1906 |
| 7-1/8 | 172 | 21-1/2 | 1809 | 2692 | 3,963,500 | 1798 | 4,404,000 | 1998 |
| 7-1/4 | 176 | 22 | 1887 | 2808 | 4,066,000 | 1845 | 4,518,000 | 2050 |
| 7-1/2 | 180 | 22-1/2 | 1969 | 2930 | 4,209,000 | 1910 | 4,677,000 | 2122 |
| 7-5/8 | 184 | 23 | 2070 | 3081 | 4,351,500 | 1974 | 4,835,000 | 2194 |
| 7-3/4 | 188 | 23-1/2 | 2154 | 3206 | 4,494,000 | 2039 | 4,993,000 | 2265 |
| 8 | 192 | 24 | 2241 | 3335 | 4,637,000 | 2104 | 5,152,000 | 2338 |
| 8-1/8 | 196 | 24-1/2 | 2348 | 3494 | 4,779,000 | 2168 | 5,310,000 | 2409 |
| 8-1/4 | 200 | 25 | 2438 | 3628 | 4,922,000 | 2233 | 5,469,000 | 2481 |

Size: Diameter and circumference are nominal. A new unused rope in relaxed state will measure larger; loading and use compacts ropes, sets splices and lessens rope size. This is especially prevalent in sizes above 4" diameter. Published nominal sizes from 4-1/8" and larger represent stabilized or preloaded size. **Weights:** Published weights of sizes 1-5/8"–4" diameter are calculated at linear density under stated preload (200d²) plus 4%. For this chart, sizes 4-1/8"–8-1/4" diameter represent un-cycled, (non-stabilized) weights.

Tensile Strengths: Tensile Strength determined in accordance with Cordage Institute 1500 Test Methods for Fiber Ropes and ISO 2307.

BOB® 12x12 Strand

Technical Information

| | |
|-------------------------|---------------|
| Specific gravity | 1.18* |
| Melting point | 284°F (140°C) |
| Critical temp. | 150°F (65°C) |
| Coefficient of friction | 0.12–0.15* |
| Elongation at break | 3%–4% |
| Fiber water absorption | <0.1% |
| UV resistance | moderate |
| Wet abrasion | superior |
| Dry abrasion | superior |

* value based on data supplied by the fiber manufacturer for new, dry fiber

Rope Specifications

Minimum Tensile Strength Minimum Tensile Strengths shown are for new (unused) rope and will decrease after use. All tests are performed in accordance with Cordage Institute Standard CI 1500-2. The rope strength will be reduced after use due to heat, abrasion, ultraviolet or chemical exposure. The tensile strengths may be further reduced by up to 50% as a result of knots or kinks. Minimum Tensile Strengths are defined as two standard deviations (typical about 10%) below the average.


Maximum Working Loads Maximum Working Loads are determined by dividing the tensile strength by the safety factor. The safety factor is a function of the physical properties of the rope, the age and history of the rope, the type of service it will be subjected to and the risks involved if failure occurs. For a rope manufacturer to give blanket working load recommendations would be like a car manufacturer giving the “safe driving speed” of their cars. Obviously the conditions of use far outweigh the design characteristics of the rope. Typically safety factors vary from 3:1 (for new rope used in applications with uniform loading and where failure would cause little or no risk to equipment or personnel) to 20:1 (for conditions involving moderate shock loading, possibility of snags or kinks or where failure could cause severe risk to equipment or personnel).

Rope Weights Rope Weights shown are average and may vary plus or minus 5%.

Working Elongation Working Elongation is shown from a preload tension of 200 times the diameter squared per the Cordage Institute Standard.

cortlandcompany.com

CT_TL_061_0222_US

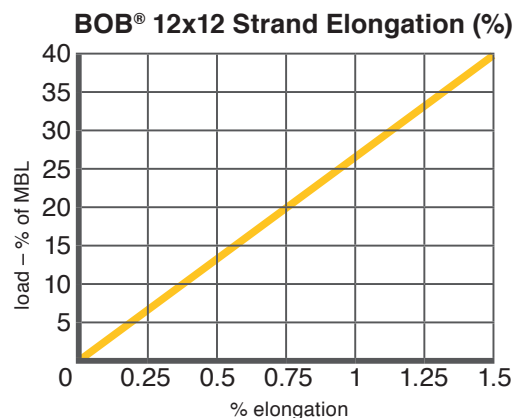

Special Requirements

Factory Splicing Various types are available for all of our ropes. Splices can be provided with various types of chafe protection or coatings.

Custom Lengths Special constructions are available on request.

Rope Terminations Cortland can provide custom terminations such as thimbles, links, rings and custom hardware. Terminations are available in plastic, bronze, stainless steel and galvanized steel. Please call, or email your requirements to cortland@cortlandcompany.com for a quotation.

Special Coatings Coatings such as polyurethane, polyethylene and vinyl esters may be applied to any of the synthetic ropes to improve snag resistance, sunlight resistance or for color coding. Cortland can provide ropes with a variety of finishes to meet your needs.

Commercial and Military Specifications Certificates of compliance are supplied at no charge if requested when placing the order. Certified test reports can be provided at an additional charge when requested at the time of the order.

Terms & Shipping Information

Payment Terms Net 30 days from the invoice date with approved credit.

Minimum Billing \$500 based on net prices.

Prices and Specifications Subject to change without notice.

Freight All prices are FOB factory – Anacortes, WA USA. Full freight allowance will be given on all surface shipments meeting minimum requirements based on delivery location, provided the invoice is paid within the 30 day terms.

Returned Goods Subject to a minimum 20% restocking charge upon inspection. No returns will be accepted without prior authorization.

