

PSR 2000 12 Strand

PSR 2000 12 Strand offers a high strength to weight ratio and is an excellent replacement for heavier polyester lines. It's unique blend of polyester and olefin co-polymer in each strand makes for a highly efficient construction. PSR 2000 12 Strand is torque balanced, has excellent wear resistance, and is one of the quickest ropes to splice.

PSR 2000 12 Strand is an excellent choice as mooring, tie-up and pendant lines, tug assist lines and for general purpose heavy marine applications.

Features & Benefits

- Low stretch
- High strength
- Torque free
- Easy splicing
- Soft hand
- Excellent abrasion resistance
- Lighter than 100% polyester ropes

Applications

- Vessel mooring lines
- Tug assist lines
- General purpose heavy marine applications

Nominal Diameter		Size (circ in.)	Approximate Weight		Minimum Tensile Strength Spliced Rope		Minimum Tensile Strength ISO Unspliced Rope	
inch	mm		lbs/100ft	kg/100m	lbs	MT (tonnes)	lbs	MT (tonnes)
1	24	3	30	44.6	25,000	11.3	27,800	12.6
1-1/8	28	3-1/2	35	52.1	32,000	14.5	35,600	16.2
1-1/4	30	3-3/4	39	58	38,000	17.2	42,200	19.1
1-5/16	32	4	47	69.9	43,000	19.5	47,800	21.7
1-1/2	36	4-1/2	60	89.3	54,000	24.5	60,000	27.2
1-5/8	40	5	72	107.2	65,000	29.5	72,200	32.8
1-3/4	44	5-1/2	84	125	75,000	34.0	83,300	37.8
2	48	6	102	151.8	92,000	41.7	102,200	46.4
2-1/8	52	6-1/2	120	178.6	108,000	49.0	120,000	54.4
2-1/4	56	7	136	202.4	125,000	56.7	138,900	63.0
2-1/2	60	7-1/2	160	238.1	147,000	66.7	163,300	74.1
2-5/8	64	8	176	261.9	158,000	71.7	175,600	79.7
2-3/4	68	8-1/2	199	296.2	184,000	83.5	204,400	92.7
3	72	9	231	343.8	207,000	93.9	230,000	104.4
3-1/4	80	10	286	425.6	252,000	114.3	280,000	127.0
3-5/8	88	11	342	509	306,000	138.8	340,000	154.3
4	96	12	413	614.6	369,000	167.4	410,000	186.0


Tensile Strengths are determined in accordance with Cordage Institute 1500, Test Methods for Fiber Rope. Weights are calculated at linear density under standard preload (200d²) plus 5%. See reverse side for application and safety information.

Technical Information

Specific gravity	1.22*
Melting point	279°F (137°C)
Critical temp.	140°F (60°C)
Coefficient of friction	0.12–0.15*
Elongation at break	15–20%
Fiber water absorption	0–1%
UV resistance	excellent
Wet abrasion	excellent
Dry abrasion	excellent

* value based on data supplied by the fiber manufacturer for new, dry fiber

PSR 2000 12 Strand Elongation (%)

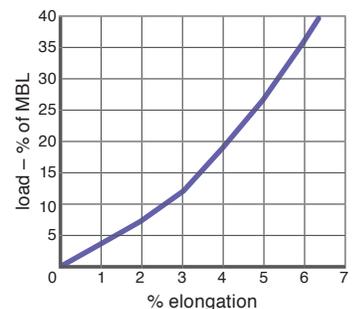

PSR 2000 12 Strand

Rope Specifications

Minimum Tensile Strength Minimum tensile strengths shown are for new (unused) rope and will decrease after use. All tests are performed in accordance with Cordage Institute Standard CI 1500-2. The rope strength will be reduced after use due to heat, abrasion, ultraviolet or chemical exposure. The tensile strengths may be further reduced by up to 50% as a result of knots or kinks. Minimum tensile strengths are defined as two standard deviations (typical about 10%) below the average.

Maximum Working Loads Maximum working loads are determined by dividing the tensile strength by the safety factor. The safety factor is a function of the physical properties of the rope, the age and history of the rope, the type of service it will be subjected to and the risks involved if failure occurs. For a rope manufacturer to give blanket working load recommendations would be like a car manufacturer giving the "safe driving speed" of their cars. Obviously the conditions of use far outweigh the design characteristics of the rope. Typically safety factors vary from 3:1 (for new rope used in applications with uniform loading and where failure would cause little or no risk to equipment or personnel) to 20:1 (for conditions involving moderate shock loading, possibility of snags or kinks or where failure could cause severe risk to equipment or personnel).

Rope Weights Rope weights shown are average and may vary plus or minus 5%.

Working Elongation Working elongation is shown from a preload tension of 200 times the diameter squared per the Cordage Institute Standard.

Special Requirements

Factory Splicing Various types are available for all of our ropes. Splices can be provided with various types of chafe protection or coatings.

Custom Lengths Special constructions are available on request.

Rope Terminations Cortland can provide custom terminations such as thimbles, links, rings and custom hardware. Terminations are available in plastic, bronze, stainless steel and galvanized steel. Please call, or email your requirements to cortland@cortlandcompany.com for a quotation.

Special Coatings Coatings such as polyurethane, polyethylene and vinylesters may be applied to any of the synthetic ropes to improve snag resistance, sunlight resistance or for color coding. Cortland can provide ropes with a variety of finishes to meet your needs.

Commercial and Military Specifications Certificates of compliance are supplied at no charge if requested when placing the order. Certified test reports can be provided at an additional charge when requested at the time of the order.